



TITLE

PULSE TRANSFORMER, 1:1, 1-10 MHz

PN

22083

REV

V

AGENCY APPROVAL: NA

SH



2

OF

10

**SPECIFICATIONS:**

1. TEMPERATURE CLASS: 105° C
2. INDUCTANCE: @ 10 kHz, 0.1Vrms  
(1 - 2) = 225 μ H MIN.
3. LEAKAGE INDUCTANCE: @ 100 kHz, 0.1 Vrms  
(1 - 2) (SHORT 3 - 4) = 0.30 μH MAX.
4. INTERWINDING CAPACITANCE: @ 100 kHz  
(1 - 2) TO (3 - 4) 15 pF, MAX.
5. TURNS RATIO: (1 - 2) : (3 - 4) = 1 : 1
6. DC RESISTANCE:  
(1 - 2), (3 - 4) = 0.4 OHMS NOMINAL
7. DIELECTRIC STRENGTH: 2000 VAC  
OR 2828 VDC

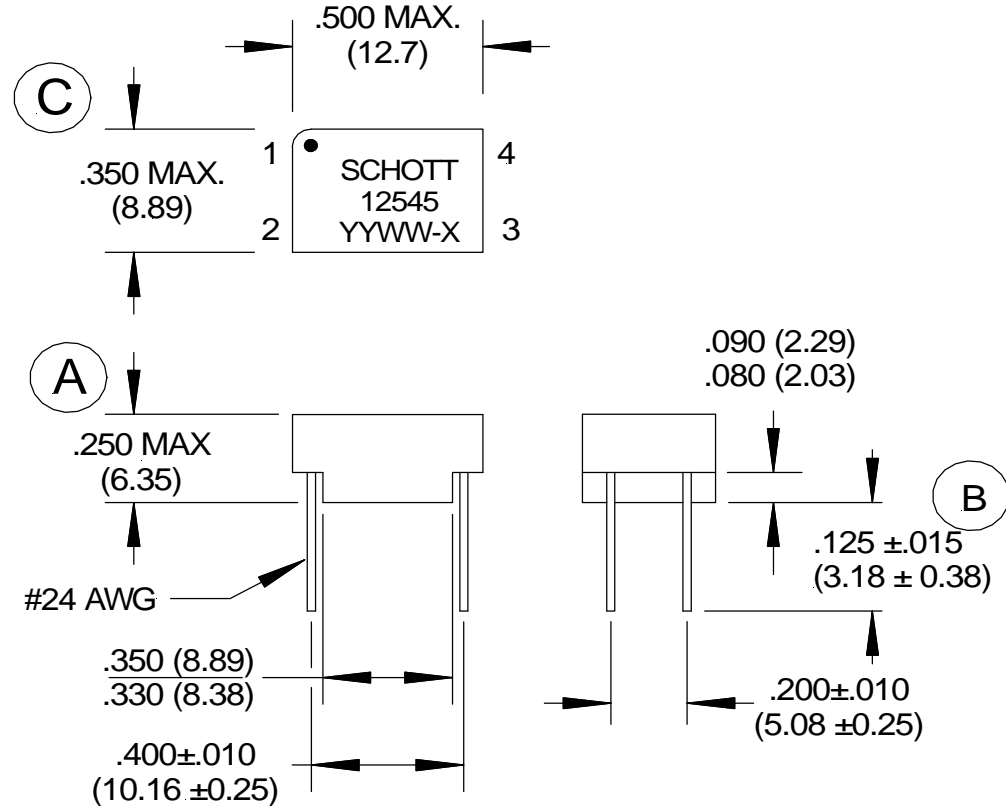

INCHES / DECIMAL	.XX =	.XXX =	ANGLES °
MILLIMETERS (mm)	.XX =		