


SPECIFICATIONS:

1. TEMPERATURE CLASS: 130° C
2. INDUCTANCE:
(1-5) @50 KHz, 1.0 VRMS = 4.0 MHy MIN.
3. TURNS RATIO:
(1-5) : (2-6) = 1CT : 1CT ± 2%
4. LEAKAGE INDUCTANCE:
(1-5) TO (2-6) SHORTED < 2.5 µHy
5. INTERWINDING CAPCITANCE:
(1-5) TO (2-6) @ 100 KHz < 50 pf
6. DC RESISTANCE:
(1-5) = 1• MAX.
(2-6) = 1• MAX.
7. DIELECTRIC STRENGTH:
(1-5) TO (2-6) = 1500 VDC.

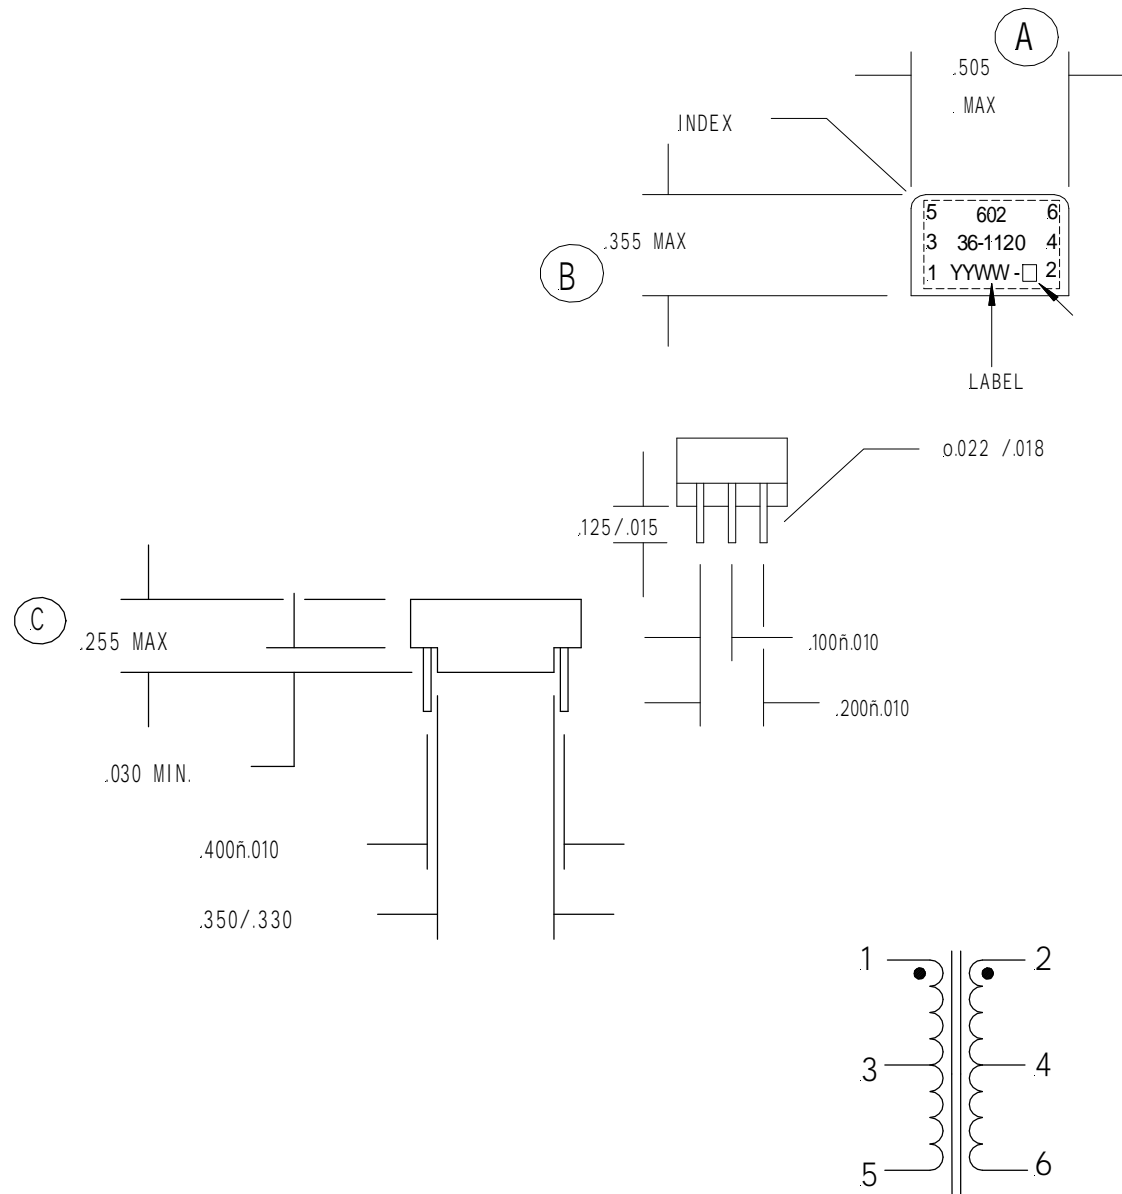

TOLERANCES UNLESS OTHERWISE SPECIFIED	INCHES / DECIMAL	.XX = ± .015	.XXX = ±.005	ANGLES ± 1°
	MILLIMETERS (mm)	.XX = ± 0.20		